




# 11

## Jurnal Crystal\_PGRI BWI.docx

-  24S-B2-Informatik 2 -- No Repository 031
-  25S-B2-Informatik 2 (Moodle PP)
-  FH Kärnten Gemeinnützige Gesellschaft mbH

---

### Document Details

**Submission ID**

trn:oid::1:3321827394

**Submission Date**

Aug 27, 2025, 4:57 AM GMT+2

**Download Date**

Aug 27, 2025, 5:01 AM GMT+2

**File Name**

Jurnal\_Crystal\_PGRI\_BWI.docx

**File Size**

294.3 KB

**6 Pages****2,953 Words****18,784 Characters**





# 12% Overall Similarity

The combined total of all matches, including overlapping sources, for each database.




## Filtered from the Report

- ▶ Bibliography
- ▶ Quoted Text
- ▶ Cited Text
- ▶ Small Matches (less than 8 words)

## Match Groups

-  **25 Not Cited or Quoted 12%**  
Matches with neither in-text citation nor quotation marks
-  **0 Missing Quotations 0%**  
Matches that are still very similar to source material
-  **0 Missing Citation 0%**  
Matches that have quotation marks, but no in-text citation
-  **0 Cited and Quoted 0%**  
Matches with in-text citation present, but no quotation marks

## Top Sources

- 8%  Internet sources
- 10%  Publications
- 4%  Submitted works (Student Papers)

### Match Groups

- 25 Not Cited or Quoted 12%**  
Matches with neither in-text citation nor quotation marks
- 0 Missing Quotations 0%**  
Matches that are still very similar to source material
- 0 Missing Citation 0%**  
Matches that have quotation marks, but no in-text citation
- 0 Cited and Quoted 0%**  
Matches with in-text citation present, but no quotation marks

### Top Sources

- 8% Internet sources
- 10% Publications
- 4% Submitted works (Student Papers)

### Top Sources

The sources with the highest number of matches within the submission. Overlapping sources will not be displayed.

<b>1</b>	Student papers	
	Syiah Kuala University	2%
<b>2</b>	Publication	
	Reva Edra Nugraha, Nur Aini Fauziyah, Silvana Dwi Nurherdiana, A.R. Yelvia Suna...	1%
<b>3</b>	Publication	
	Seyed Sajad Hashemi, Keikhosro Karimi, Abdul Majid Karimi. "Ethanolic ammonia ...	<1%
<b>4</b>	Internet	
	ir.uitm.edu.my	<1%
<b>5</b>	Publication	
	Moraes, Bruna S., Marcelo Zaiat, and Antonio Bonomi. "Anaerobic digestion of vin...	<1%
<b>6</b>	Internet	
	doaj.org	<1%
<b>7</b>	Internet	
	www.ncbi.nlm.nih.gov	<1%
<b>8</b>	Publication	
	Sonam Priyadarshani, Preeti Nandal, Anju Arora, Gautam Chawla, Rajesh kumar, ...	<1%
<b>9</b>	Publication	
	SuriyaPrakaash LakshmiBalasubramaniam, Caitlin Howell, Mehdi Tajvidi, Denise ...	<1%
<b>10</b>	Publication	
	M Rilyanti, U N Faidah, S Suharso, K D Pandiangan, I Ilim. "Utilization of zeolite H-...	<1%

11	Publication	Rahul Vikram Singh, Palak Sharma, Krishika Sambyal. "Application of Sugarcane ..."	<1%
12	Internet	jestec.taylors.edu.my	<1%
13	Publication	Vasi Uddin Siddiqui, R.A. Ilyas, S.M. Sapuan, Nur Hafizah Ab Hamid et al. "Alginate..."	<1%
14	Internet	runirac2018.pbru.ac.th	<1%
15	Publication	"Plant Biotechnology: Progress in Genomic Era", Springer Science and Business M...	<1%
16	Publication	Dhanashri S. Pendse, Minal Deshmukh, Ashwini Pande. "Different pre-treatments..."	<1%
17	Publication	J.-K. Xu, R.-C. Sun. "Recent Advances in Alkaline Pretreatment of Lignocellulosic Bi..."	<1%
18	Publication	Mine Aydın Kurç, Hakime Hülya Orak, Dumrul Gülen, Hilmican Caliskan, Merve Ar...	<1%
19	Publication	Yanchal Jugwanth, Y. Sewsynker-Sukai, E.B. Gueguim Kana. "Valorization of sugar..."	<1%
20	Internet	perpustakaan.poltekkes-malang.ac.id	<1%
21	Internet	www.frontiersin.org	<1%
22	Internet	www.tandfonline.com	<1%
23	Internet	www.ummy.edu.ng	<1%

# MASS BALANCE ANALYSIS OF GLUCOSE FROM SUGARCANE BAGASSE THROUGH ULTRASONIC ENZYMATIC HYDROLYSIS

Adithya Daffa Rabbani<sup>1</sup> – Miranda Annisa Anwar<sup>1</sup> – Wiliandi Saputro<sup>2,3</sup> – Intan Suhada Azmi<sup>4</sup> – Ardika Nurmuwati<sup>1,2</sup> – Erwan Adi Saputro<sup>1,2\*</sup>

<sup>1</sup>Department of Chemical Engineering, Faculty of Engineering, Universitas Pembangunan Nasional "Veteran" Jawa Timur, Surabaya 60294, Indonesia

<sup>2</sup>Low Carbon Technologies Research Center, Universitas Pembangunan Nasional "Veteran" Jawa Timur, Surabaya, East Java, 60294, Indonesia

<sup>3</sup>Department of Mechanical Engineering, Faculty of Engineering, Universitas Pembangunan Nasional "Veteran" Jawa Timur, Surabaya 60294, Indonesia

<sup>4</sup>Faculty of Chemical Engineering, Universiti Teknologi MARA (UiTM) Cawangan Johor, Kampus Pasir Gudang, 81750, Masai, Johor, Malaysia

\*Email: erwanadi.tk@upnjatim.ac.id

## Article History

Received: XX XXXXXXX XXX; Received in Revision: XX XXXXXXX XXX; Accepted: XX XXXXXXX XXX

## Abstract

Indonesia is one of the largest sugar-producing countries, with numerous sugar mills across the nation. Sugar production requires a significant amount of sugarcane, and approximately 35-40% of processed sugarcane results in bagasse (sugarcane residue). While sugar is the main product, other by-products such as molasses and filter cake receive less attention. Bagasse, composed of lignocellulose, has potential as a raw material for bioenergy production, particularly glucose, which can be converted into bioethanol. This study explores the conversion of sugarcane bagasse into glucose through an enzymatic ultrasonic hydrolysis process. Initially, the bagasse undergoes delignification using 6% sodium hydroxide to remove lignin and free cellulose for further processing. The delignified bagasse is then hydrolyzed using cellulase enzyme under ultrasonic conditions. The results indicate that glucose production is influenced by factors such as raw material preparation, enzyme activity, temperature, and pH. Mass balance calculations were applied to assess the input and output of materials throughout the delignification and hydrolysis processes. The findings show that 10 grams of delignified sugarcane bagasse yielded 5.955 grams of glucose, demonstrating the potential of sugarcane bagasse as a source of bioenergy through glucose production. These results support the utilization of agricultural waste in bioethanol production and contribute to sustainable energy development.

Keywords: Enzymatic Hydrolysis, Glucose Production, Sugarcane Bagasse

## Abstrak

Indonesia merupakan salah satu produsen gula terbesar, di mana sekitar 35-40% tebu yang diolah menghasilkan bagasse (ampas tebu) sebagai produk samping. Bagasse yang kaya lignoselulosa berpotensi dimanfaatkan sebagai bahan baku bioenergi, khususnya glukosa yang dapat dikonversi menjadi bioetanol. Penelitian ini mengkaji konversi bagasse tebu menjadi glukosa melalui proses hidrolisis enzimatis dengan bantuan ultrasonik. Tahap awal melibatkan delignifikasi menggunakan larutan NaOH 6% untuk menghilangkan lignin sehingga selulosa lebih mudah dihidrolisis. Selanjutnya, bagasse terdelignifikasi diproses menggunakan enzim selulase dalam kondisi ultrasonik. Hasil penelitian menunjukkan bahwa produksi glukosa dipengaruhi oleh persiapan bahan baku, aktivitas enzim, suhu, dan pH. Perhitungan neraca massa menunjukkan bahwa 10 gram bagasse terdelignifikasi menghasilkan 5,955 gram glukosa. Temuan ini menegaskan potensi pemanfaatan bagasse sebagai sumber bioenergi serta mendukung upaya pengembangan energi terbarukan berbasis limbah pertanian.

Keywords: Hidrolisis Enzimatis, Produksi Glukosa, Ampas Tebu

\*Erwan Adi Saputro

E-mail address: erwanadi.tk@upnjatim.ac.id

## 1. Introduction

Indonesia is one of the major sugar-producing countries, with numerous sugar mills operating throughout the archipelago. In the sugar production process, sugarcane bagasse (SCB), a fibrous residue, accounts for approximately 35–40% of the processed sugarcane, while only about 5% is converted into crystal sugar (Trisakti and br Silitonga, 2015). Alongside molasses and filter cake, bagasse remains one of the most abundant by-products. Unfortunately, these by-products, especially SCB, have not received the same level of attention as the primary product. Considering that SCB is already collected and available on-site in sugar mills, it has significant potential as a biomass feedstock for value-added products (Furlan *et al.*, 2013). Moreover, the increasing global energy demand and the gradual depletion of fossil fuel reserves have intensified interest in renewable energy sources, particularly those derived from biomass (Wong and Sanggari, 2014). Globally, sugarcane industries generate massive volumes of SCB. For instance, during the 2010/2011 harvest season, over 625 million tons of sugarcane were processed, producing approximately 208 million tons of bagasse (Rocha *et al.*, 2012). While most of this residue is used as boiler fuel in the mills, a substantial portion remains unused due to excess generation beyond the boiler's burning capacity (Amorim *et al.*, 2011). The accumulation of SCB over time poses environmental concerns, as it is flammable and requires significant storage space, leading to pollution and safety risks (Anisya, Fitra Andriana and Islamsyah, 2020). Given these challenges and opportunities, valorizing SCB for bioenergy production, particularly bioethanol via glucose intermediate, emerges as a promising solution.

SCB is a type of lignocellulosic biomass, primarily contains fibrous components, with cellulose as the major fraction (around 40–45%), followed by hemicellulose (30–35%), and a smaller portion of lignin (20–30%) (Nasution, Lelinasari and Kelana, 2022). Cellulose is a linear homopolymer of glucose, while hemicellulose is a branched heteropolymer of various sugars, and lignin is a complex aromatic polymer that binds the structure tightly (Sarkar *et al.*, 2012). These components form a compact matrix that resists enzymatic attack. Thus, pretreatment is required to break this structure, reduce cellulose crystallinity, increase porosity, and improve hydrolysis efficiency. Among various methods, alkaline pretreatment using NaOH is effective in removing lignin and enhancing cellulose accessibility (Furlan *et al.*, 2012; de Araujo Guilherme *et al.*, 2019). Lignin's presence has been reported to inhibit enzymatic hydrolysis by adsorbing enzymes and reducing their effectiveness (Brienzo *et al.*, 2015).

The conversion of lignocellulosic biomass into glucose involves two key stages: pretreatment (e.g., delignification) and hydrolysis. In the first stage, lignin and hemicellulose are separated to expose the cellulose fibers. In the second stage, the cellulose is broken down into fermentable sugars, including glucose, via enzymatic hydrolysis (Rabelo *et al.*, 2011; Velmurugan and Muthukumar, 2011). Enzymatic hydrolysis using cellulase is environmentally friendly and efficient but requires effective pretreatment to achieve high conversion rates. The glucose obtained can be further fermented into bioethanol or upgraded into other valuable bio-based chemicals (Galadima and Muraza, 2019). The production of glucose from lignocellulose is considered sustainable and cost-effective due to the abundance of agricultural waste like SCB (Cardona, Quintero and Paz, 2010; Restiawaty *et al.*, 2020).

Advancements in pretreatment technologies, including ultrasonic-assisted hydrolysis, have shown promising results in improving cellulose conversion. Combining physical disruption with enzymatic hydrolysis may enhance enzyme-substrate interaction and reduce hydrolysis time (Sritrakul, Nitisingprasert and Keawsompong, 2017). However, pretreatment remains one of the most expensive and least technologically mature steps in the overall biomass-to-bioethanol conversion pathway. Despite this, the biochemical route remains attractive due to its lower environmental impact and potential for high glucose yield, especially when optimized with the appropriate pretreatment conditions (Asgher, Ahmad and Iqbal, 2013; Ajala *et al.*, 2021).

This study aims to evaluate glucose production from sugarcane bagasse through a combination of alkaline pretreatment and enzymatic ultrasonic hydrolysis. A mass balance approach was applied to assess the input and output of materials throughout the process. This research highlights the potential of sugarcane bagasse as a renewable and sustainable source of glucose, contributing to the broader development of bioethanol and bio-based industries.

## 2. Methodology

### 2.1. Materials and method

The materials used in this study included sugarcane bagasse (150 g), sodium hydroxide p.a. (Merck, Germany), cellulase enzyme (Nanobio, Indonesia), citric buffer (MitraLab, Indonesia), and distilled water.

Sugarcane bagasse was collected from local sugarcane juice vendors in Surabaya, East Java, Indonesia. The bagasse was sorted to obtain good-quality samples, sun-dried, and subsequently ground with a blender to produce a fine powder. The powdered bagasse was stored in an airtight plastic container to prevent contamination.

Delignification was performed by placing 150 g of powdered bagasse into a beaker glass, followed by the addition of 1500 mL of 6% sodium hydroxide solution (Merck). The mixture was heated at 100 °C for 1 h using a hot plate stirrer. After treatment, the solid residue was separated from the filtrate by filtration, then thoroughly washed with distilled water until a neutral pH was achieved. The delignified bagasse was finally dried at 105 °C for 2 h to remove moisture and residual alkali, resulting in lignin-reduced sugarcane bagasse suitable for hydrolysis.

For the hydrolysis step, 10 grams of the delignified bagasse were mixed with 100 mL of 0.1 M citric buffer (pH 5) and 5 mL of cellulase enzyme to initiate the enzymatic reaction. The mixture was then subjected to ultrasonic treatment for 30 minutes at 40 °C to enhance enzyme activity and facilitate substrate disruption. After treatment, the hydrolysate was subsequently filtered to separate the solid residue from the liquid fraction, and the glucose content in the filtrate was analyzed using a refractometer for quantitative determination.

### 2.2. Equipment Used

This subsection presents the equipment utilized during the delignification and hydrolysis processes. The visual documentation and identification of tools aim to provide a clear overview of the experimental setup and support reproducibility of the method.

The equipment used in the delignification process consisted of a beaker glass, a thermometer, and a hot plate stirrer. The beaker glass was employed as the reaction vessel to contain the mixture of sugarcane bagasse and NaOH solution. The thermometer was used to monitor and control the reaction temperature throughout the process. Meanwhile, the hot plate stirrer provided both heating and continuous stirring, ensuring a uniform temperature distribution and homogeneous mixing between the sample and the chemical solution.

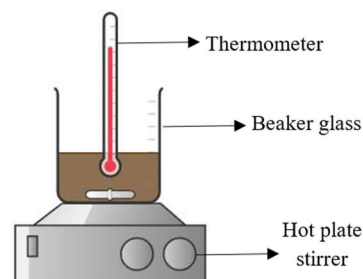


Figure 1. Delignification Equipment

The equipment used in the hydrolysis process consisted of a beaker glass and an ultrasonic bath device. The beaker glass was used as a container for the enzymatic hydrolysis reaction, while the ultrasonic bath device provided ultrasonic waves to enhance the hydrolysis process by improving enzyme penetration and substrate disruption.

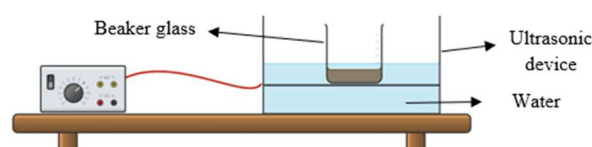


Figure 2. Hydrolysis Equipment

### 3. Results and Discussion

Mass balance, also referred to as material balance, is a fundamental principle derived from the law of conservation of mass, which states that the total mass entering a system must be equal to the total mass leaving it (Saputro *et al.*, 2021). In this context, no accumulation occurs within the system, and the transformation of materials does not alter the overall mass quantity (Heriyadi and Kusnandar, 2014). This principle was applied in the analysis of glucose production from sugarcane bagasse (SCB), as summarized in Table 1.

Based on the mass balance shown in Table 1, the hydrolysis of 10 grams of delignified SCB resulted in 5.955 grams of hydrolysis filtrate. The glucose yield is influenced by several factors, including substrate quality, enzyme concentration, hydrolysis temperature, and reaction time. The pretreatment step, particularly delignification with 6% NaOH, plays a vital role in enhancing glucose yield by removing lignin, reducing cellulose crystallinity, and increasing porosity, thereby improving enzyme accessibility during the hydrolysis process.

The enzymatic hydrolysis was conducted under ultrasonic conditions (40 kHz, 60 W) for 30 minutes, resulting in 5.955 grams of glucose, alongside 25 grams of dregs and 96.709 grams of residual solution. This corresponded to a glucose content of 5.8%. This finding is consistent with previous studies, which have shown that cellulase enzymes effectively degrade cellulose into glucose (Gomez Del Pulgar and Saadeddin, 2014). The breakdown of cellulose into glucose involves a consortium of enzymes: endoglucanases that cleave internal  $\beta$ -1,4-glucosidic linkages, exoglucanases that release cellobiose from cellulose chain ends, cellobiohydrolases, and  $\beta$ -glucosidases that convert cellobiose into glucose (Lakhundi, Siddiqui and Khan, 2015). These enzymes act synergistically to disrupt the solid-liquid interface and hydrolyze cellulose polymers into fermentable sugars. Ultrasonication further enhances this process by improving mass transfer and enzyme-substrate interactions. Through acoustic cavitation, ultrasonic waves generate microbubbles that collapse violently, producing localized high temperatures and pressures. This phenomenon increases the substrate surface area, enhances porosity, and ultimately facilitates more efficient hydrolysis (Córdova *et al.*, 2022).

**Table 1.** Mass Balance of Sugarcane Bagasse Hydrolysis by Enzymatic-Ultrasonic Process

No	Process	Input	Output
1	Delignification	Sugarcane bagasse	Lignin free sugarcane bagasse
		Solution of sodium hydroxide	Residue
	<b>Total</b>	<b>1725.241 g</b>	<b>1725.241 g</b>
2	Hydrolysis	Lignin free sugarcane bagasse	Dregs
		Citric Buffer	Residual solution
	<b>Total</b>	<b>117.664 g</b>	<b>117.664 g</b>

Compared to conventional methods, the integration of enzymatic hydrolysis and ultrasonication offers time efficiency and energy savings. For instance, Wang *et al.* (2022) achieved a glucose

yield of 91.2% from SCB using 10% NaOH and ethylene glycol pretreatment at 130 °C for 60 minutes, followed by 72 hours of enzymatic hydrolysis. Another study reached a yield of 91.6% after pretreatment at 180 °C for 30 minutes and 72-hour enzymatic hydrolysis (Córdova et al., 2022). While these yields are higher, they required significantly longer processing times. In contrast, the current study achieved a 5.8% glucose yield in just 30 minutes of hydrolysis, highlighting the potential of combining ultrasonication with enzymatic treatment **as a rapid and effective method for** SCB conversion.

The 5.955 g glucose yield from 10 g of delignified SCB demonstrates the viability of SCB as a renewable feedstock for bio-based chemical production. This process valorizes agricultural waste and supports sustainable bioenergy initiatives. Future studies should focus on optimizing hydrolysis conditions, enzyme dosage, and pretreatment parameters to increase yield and scalability. In conclusion, SCB shows promising potential as a raw material for glucose production through **a combination of** alkaline **pretreatment and** ultrasonic **enzymatic hydrolysis**. This pathway contributes to the development of sustainable biomass utilization strategies and circular economy initiatives.

#### 4. Conclusion

This study demonstrated that sugarcane bagasse (SCB) can be effectively converted into glucose through alkaline pretreatment followed by ultrasonic-assisted enzymatic hydrolysis. The process yielded 5.955 g of glucose from 10 g of delignified SCB in just 30 minutes, indicating its potential for rapid biomass valorization. To enhance efficiency and scalability, further research is recommended to optimize enzyme loading, reaction time, and pretreatment conditions.

#### References

- Ajala, E. O. et al. (2021) 'Sugarcane bagasse: a biomass sufficiently applied for improving global energy, environment and economic sustainability', *Bioresources and Bioprocessing*. Springer Science and Business Media Deutschland GmbH. doi: 10.1186/s40643-021-00440-z.
- Amorim, H. V. et al. (2011) 'Scientific challenges of bioethanol production in Brazil', *Applied Microbiology and Biotechnology*, pp. 1267–1275. doi: 10.1007/s00253-011-3437-6.
- Anisya, M., Fitra Andriana, Y. and Islamsyah, H. (2020) 'Eksplorasi Limbah Ampas Tebu (Bagasse) untuk Material Produk Ecofashion', *Jurnal IKRA-ITH Humaniora*, 4(3), pp. 235–243.
- de Araujo Guilherme, A. et al. (2019) 'Ethanol production from sugarcane bagasse: Use of different fermentation strategies to enhance an environmental-friendly process', *Journal of Environmental Management*, 234, pp. 44–51. doi: 10.1016/j.jenvman.2018.12.102.
- Asgher, M., Ahmad, Z. and Iqbal, H. M. N. (2013) 'Alkali and enzymatic delignification of sugarcane bagasse to expose cellulose polymers for saccharification and bio-ethanol production', *Industrial Crops and Products*, 44, pp. 488–495. doi: 10.1016/j.indcrop.2012.10.005.
- Brienzo, M. et al. (2015) 'Relationship between physicochemical properties and enzymatic hydrolysis of sugarcane bagasse varieties for bioethanol production', *New Biotechnology*, 32(2), pp. 253–262. doi: 10.1016/j.nbt.2014.12.007.
- Cardona, C. A., Quintero, J. A. and Paz, I. C. (2010) 'Production of bioethanol from sugarcane bagasse: Status and perspectives', *Bioresource Technology*, 101(13), pp. 4754–4766. doi: 10.1016/j.biortech.2009.10.097.
- Córdova, A. et al. (2022a) 'Recent Advances in the Application of Enzyme Processing Assisted by Ultrasound in Agri-Foods: A Review', *Catalysts*, 12(1). doi: 10.3390/catal12010107.
- Córdova, A. et al. (2022b) 'Recent Advances in the Application of Enzyme Processing Assisted by Ultrasound in Agri-Foods: A Review', *Catalysts*, 12(1). doi: 10.3390/catal12010107.
- Furlan, F. F. et al. (2012) 'Assessing the production of first and second generation bioethanol from sugarcane through the integration of global optimization and process detailed modeling', *Computers and Chemical Engineering*, 43, pp. 1–9. doi: 10.1016/j.compchemeng.2012.04.002.
- Furlan, F. F. et al. (2013) *Bioelectricity versus bioethanol from sugarcane bagasse: is it worth being flexible?*, *Biotechnology for Biofuels*. doi: 10.1186/1754-6834-6-142.
- Galadima, A. and Muraza, O. (2019) 'Zeolite catalyst design for the conversion of glucose to furans and other renewable fuels', *Fuel*, 258. doi: 10.1016/j.fuel.2019.115851.
- Gomez Del Pulgar, E. M. and Saadeddin, A. (2014) 'The cellulolytic system of thermobifida fusca', *Critical Reviews in Microbiology*, 40(3), pp. 236–247. doi: 10.3109/1040841X.2013.776512.

- Heriyadi, P. and Kusnandar, F. (2014) *Prinsip Teknik Pangan*. 1st edn. Banten: Penerbit Universitas Terbuka.
- Lakhundi, S., Siddiqui, R. and Khan, N. A. (2015) 'Cellulose degradation: A therapeutic strategy in the improved treatment of Acanthamoeba infections', *Parasites and Vectors*, 8(1). doi: 10.1186/s13071-015-0642-7.
- Nasution, M. H., Lelinasari, S. and Kelana, M. G. S. (2022) 'A review of sugarcane bagasse pretreatment for bioethanol production', in *IOP Conference Series: Earth and Environmental Science*. IOP Publishing Ltd. doi: 10.1088/1755-1315/963/1/012014.
- Rabelo, S. C. *et al.* (2011) 'Production of bioethanol, methane and heat from sugarcane bagasse in a biorefinery concept', *Bioresource Technology*, 102(17), pp. 7887–7895. doi: 10.1016/j.biortech.2011.05.081.
- Restiawaty, E. *et al.* (2020) 'Bioethanol production from sugarcane bagasse using neurospora intermedia in an airlift bioreactor', *International Journal of Renewable Energy Development*, 9(2), pp. 247–253. doi: 10.14710/ijred.9.2.247-253.
- Rocha, G. J. M. *et al.* (2012) 'Steam explosion pretreatment reproduction and alkaline delignification reactions performed on a pilot scale with sugarcane bagasse for bioethanol production', *Industrial Crops and Products*, 35(1), pp. 274–279. doi: 10.1016/j.indcrop.2011.07.010.
- Saputro, E. A. *et al.* (2021) 'Mass Balance Analysis of Bioethanol Production from Petai Peel (*Parkia speciosa*) through Enzymatic Process', *International Journal of Eco-Innovation in Science and Engineering*, 2(02), pp. 30–33. doi: 10.4186/ijeise.upnjatim.ac.id/E-ISSN.
- Sarkar, N. *et al.* (2012) 'Bioethanol production from agricultural wastes: An overview', *Renewable Energy*, 37(1), pp. 19–27. doi: 10.1016/j.renene.2011.06.045.
- Sritrakul, N., Nitisinprasert, S. and Keawsompong, S. (2017) 'Evaluation of dilute acid pretreatment for bioethanol fermentation from sugarcane bagasse pith', *Agriculture and Natural Resources*, 51(6), pp. 512–519. doi: 10.1016/j.anres.2017.12.006.
- Trisakti, B. and br Silitonga, Y. (2015) 'PEMBUATAN BIOETANOL DARI TEPUNG AMPAS TEBU MELALUI PROSES HIDROLISIS TERMAL DAN FERMENTASI SERTA RECYCLE VINASSE (PENGARUH KONSENTRASI TEPUNG AMPAS TEBU, SUHU DAN WAKTU HIDROLISIS)', *Jurnal Teknik Kimia USU*, 4(3).
- Velmurugan, R. and Muthukumar, K. (2011) 'Utilization of sugarcane bagasse for bioethanol production: Sono-assisted acid hydrolysis approach', *Bioresource Technology*, 102(14), pp. 7119–7123. doi: 10.1016/j.biortech.2011.04.045.
- Wang, B. *et al.* (2022) 'Enhancement of sugar release from sugarcane bagasse through NaOH-catalyzed ethylene glycol pretreatment and water-soluble sulfonated lignin', *International Journal of Biological Macromolecules*, 221, pp. 38–47. doi: 10.1016/j.ijbiomac.2022.08.193.
- Wong, Y. C. and Sanggari, V. (2014) 'Bioethanol production from sugarcane bagasse using fermentation process', *Oriental Journal of Chemistry*, 30(2), pp. 507–513. doi: 10.13005/ojc/300214.